

## Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Low Quiescent Current: 5uA at 6V
- Output voltage accuracy: tolerance  $\pm 2\%$

## Applications

- Battery-powered equipment
- Reference voltage sources
- Cameras, video cameras
- Portable AV systems
- Mobile phones
- Portable games

## General Description

XJS6206 series are a highly precise, lower consumption, 3 terminal, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage . The TX6218 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is

compatible with low ESR ceramic capacitors. The current limiter's foldback circuit operates as a short circuit protection as well as the output current limiter for the output pin. Output voltages are internally by laser trimming technologies. It is selectable in 0.1V increments within a range of 3.0V to 3.6V. TX6218 series are available in SOT-23 package.


## Order Information

6206-(1)(2)(3)(4)

Designator	Symbol	Description
(1)(2)	Integer	Output Voltage(3.0~3.6V)
(3)	N	Package:SOT23
(4)	R	RoHS / Pb Free
	G	Halogen Free

Note: "①②" stands for output voltages. Other voltages can be specially customized

## Block Diagram

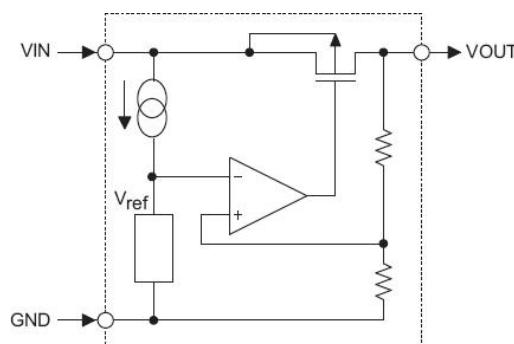

**Pin Assignment**

SOT23 (Top View)


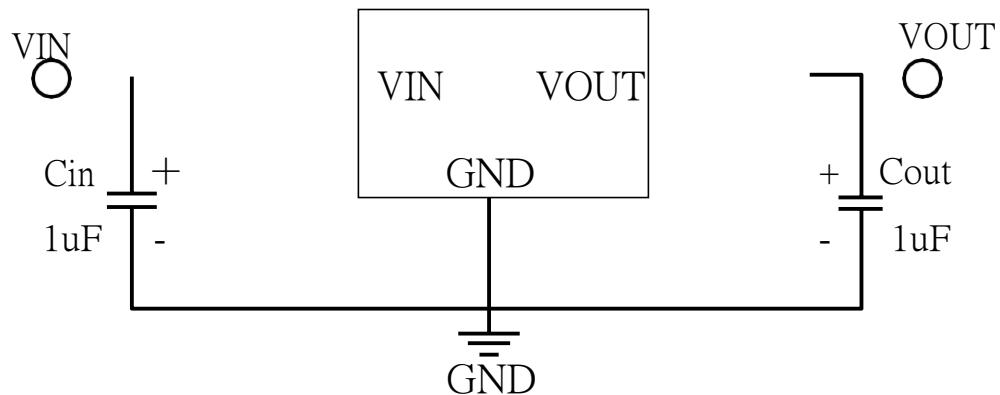



Table1: 6218 series (SOT23 PKG)

PIN NO.	PIN NAME	FUNCTION
1	GND	GND pin
2	VIN	Input voltage pin
3	VOUT	Output voltage pin

**Typical Application****XJS6206**

**Marking Rule**


① represents product number

MARK	PRODUCT SERIES
6	TX6218

② represents 3 pins regulator

MARK	PRODUCT SERIES
VOLTAGE=0.1~3.0V	VOLTAGE=3.1V~6.0V

③ represents output voltage

MARK	VOLTAGE(V)		MARK	VOLTAGE(V)	
0	-	3.1	-	F	1.6
1	-	3.2	-	H	1.7
2	-	3.3	-	K	1.8
3	-	3.4	-	L	1.9
4	-	3.5	-	M	2.0
5	-	3.6	-	N	2.1
6	-	3.7	-	P	2.2
7	-	3.8	-	R	2.3
8	-	3.9	-	S	2.4
9	-	4.0	-	T	2.5
A	-	4.1	-	U	2.6
B	1.2	4.2	-	V	2.7
C	1.3	4.3	-	X	2.8
D	1.4	4.4	-	Y	2.9
E	1.5	4.5	-	Z	3.0

④ Z



300mA Low Power LDO

XJS6206

### Absolute Maximum Ratings

Parameter		Symbol	Ratings	Units
Input Voltage		V <sub>IN</sub>	8	V
Output Current		I <sub>OUT</sub>	300*	mA
Output Voltage		V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	SOT-23	P <sub>d</sub>	0.20	W
Operating Temperature Range		T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range		T <sub>stg</sub>	-55~+125	°C

$$*I_{OUT}=P_d/(V_{IN}-V_{OUT})$$

### Electrical Characteristics

XJS6206 for any output voltage

(Ta=25°C)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>out</sub>	V <sub>in</sub> =V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤30mA	V <sub>out</sub> ×0.98	--	V <sub>out</sub> ×1.02	V
Output Current*1	I <sub>out</sub>	V <sub>in</sub> -V <sub>out</sub> =1V	--	300	--	mA
Low dropout*2	V <sub>drop</sub>	Refer to the next table				
Line Regulation	△ V <sub>out1</sub> /(V <sub>in</sub> ·V <sub>out</sub> )	1.6V≤V <sub>in</sub> ≤8V I <sub>out</sub> =40mA	--	0.05	0.2	%/V
Load Regulation	△ V <sub>out</sub> /Δ I <sub>out</sub>	V <sub>in</sub> = V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤80mA	--	12	30	mV
Output voltage Temperature Coefficient	△ V <sub>out</sub> /(T <sub>a</sub> ·V <sub>out</sub> )	I <sub>out</sub> =30mA 0°C≤T <sub>a</sub> ≤70°C	--	±100	--	Ppm/°C
Supply Current	I <sub>ss</sub>	--	--	5	10	uA
Input Voltage	V <sub>in</sub>	--	--	6	8	V
PSRR	PSRR	F=1KHz V <sub>in</sub> =V <sub>out</sub> +1V	--	50	--	dB
Output Noise	EN	BW=10Hz~100KHz	--	30	--	uVrms

### Electrical Characteristics by Output Voltage:

Output Voltage V <sub>out</sub> (V)	Dropout Voltage V <sub>dif</sub> (V)		
	Conditions	Typ.	Max.
V <sub>out</sub> ≤1.5V	I <sub>out</sub> =100 mA	0.50	0.68
1.8 ≤ V <sub>out</sub> ≤ 2		0.39	0.53
2.8 ≤ V <sub>out</sub> ≤ 5.0		0.28	0.39

#### Package Information

##### 3-pin SOT23 Outline Dimensions

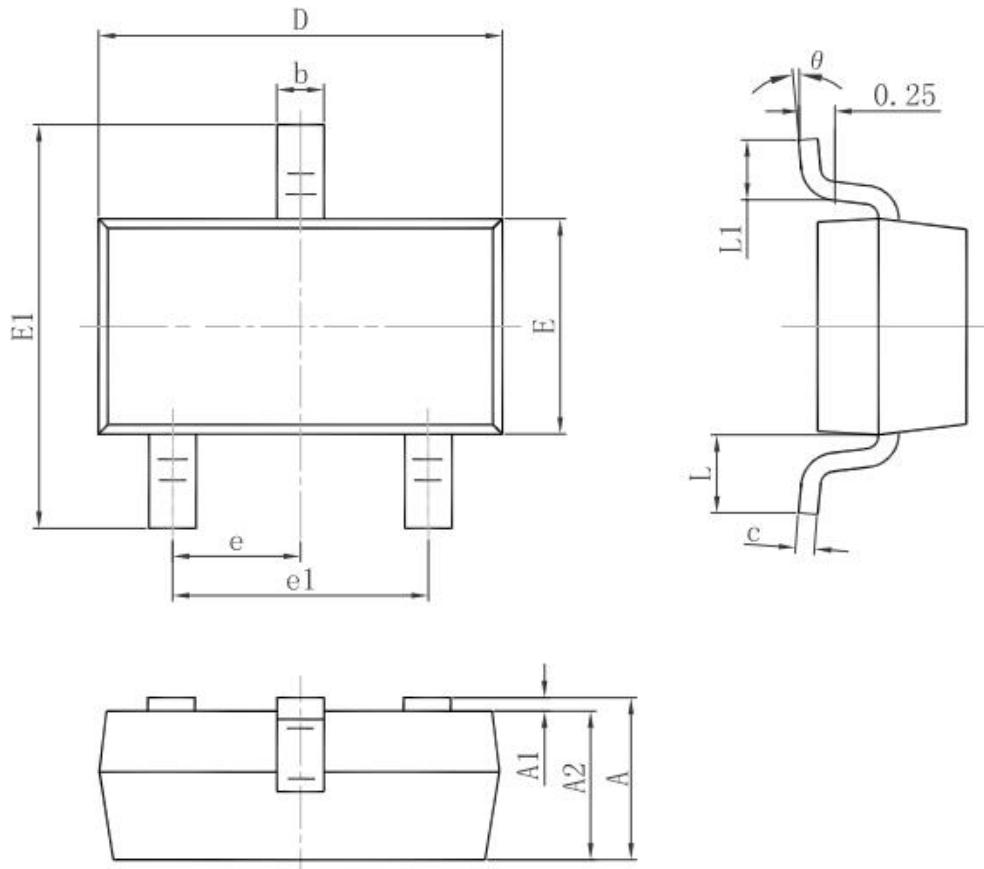

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°